


Floor Scale KERN BID



Multi-range balances, ideal, high maximum loads need to be weighed, but in the lower load range you still need high resolution. This means that two scales can be replaced with one - which saves space and money!

## Floor scale with the best price-to-performance ratio – now also as high-resolution multi-range balance, verification optional

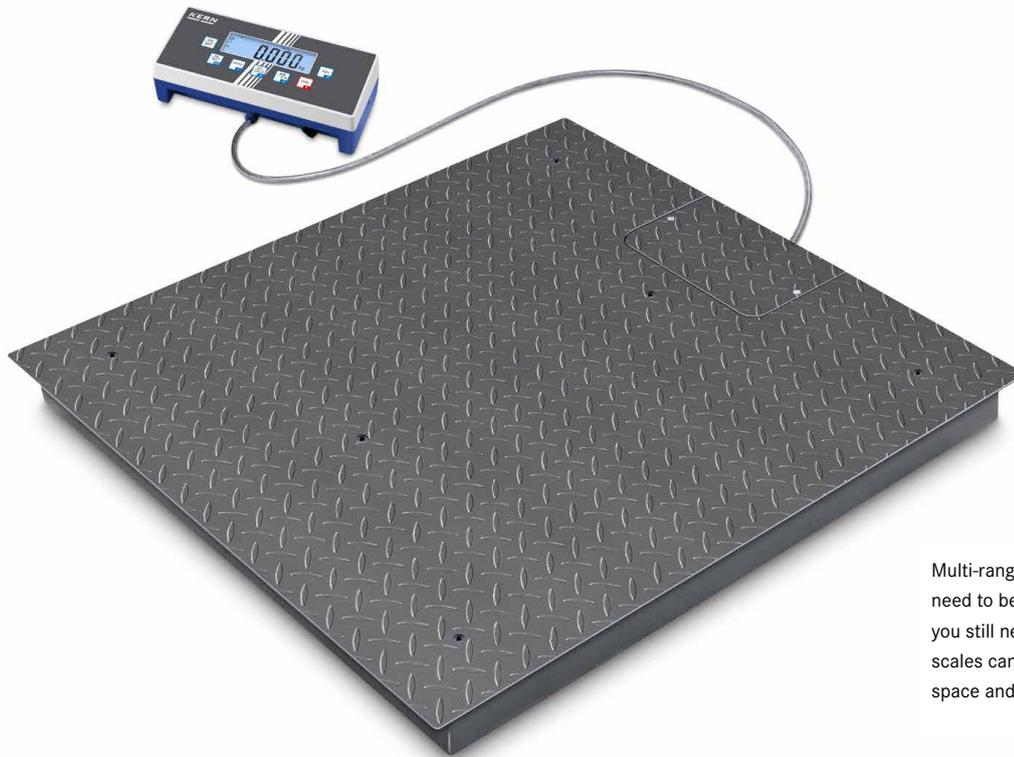

Did you know? Our floor scales are delivered in a robust wooden box. This protects the high-quality weighing technology from environmental influences and stresses during transportation. KERN – always one step ahead

**3** Access ramp incl. pair of base plates to facilitate access of e.g. wire cage trolleys, shelf trolleys, container trolleys, storage trolleys, sack trucks, transpallets, mobile containers, containers refuse etc.

**4** Verification plug, for verified balances this enables you to separate the display device and platform without affecting the verification, e.g. for installing the scale in a packing and dispatch table, pit frame etc. at a later date. Please order this at the same time as you purchase your scale

\*In addition to the RS-232 data interface, which is integrated as standard, only one other data interface can be installed and operated

! Shipment via freight forwarder. Please ask for dimensions, gross weight, shipping costs

### Floor Scale KERN BID

#### Features

- KERN BID 1T-4EM: Compact special size, especially for weighing europallets
- **1** Display device: Plastic, protected against dust and water splashes IP65. for details see KERN KIB-TM
- **2** Weighing bridge out of anti-slip corrugated steel, 4 load cells, alloy steel, silicone-coated, IP67
- Easy levelling of the weighing bridge as well as access to the junction box from above
- Totalising of weights and piece counts
- Thanks to interfaces such as RS-232 or USB, WiFi, Bluetooth, Ethernet (optional), the scale can easily be connected to existing networks. Data exchange between the scale, PC or printer
- Searching and remote control of the balance using external control devices or computers with the KERN Communication Protocol (KCP). KCP is a standardised interface command structure for KERN balances and other instruments which allows you to recall and manage all relevant parameters and device functions. You can therefore simply connect KERN devices with KCP to computers, industrial control systems and other digital systems. In a large number of cases the KCP is compatible with the MT-SICS protocol.

#### Technical data

- Large LCD display, digit height 25 mm
- Weighing plate dimensions, steel, powder-coated, W×D×H
  - A** 1000×1000×108 mm **B** 1200×1000×108 mm
  - C** 1200×1500×108 mm **D** 1500×1500×108 mm
- Dimensions of display device W×D×H 268×115×80 mm
- Cable length of display device approx. 5 m
- Permissible ambient temperature -10 °C/40 °C

#### Accessories

- Protective working cover, scope of delivery 5 items, KERN EOC-A01S05
- Pair of base plates to fix the weighing bridge to the floor, KERN BIC-A07
- **3** Ascending ramp, steel, powder-coated, for models with weighing plate size
  - A, B**: 1000×1000×108 mm, KERN BIC-A01
  - C**: 1200×1000×108 mm, KERN BIC-A02
  - D**: 1500×1000×108 mm, KERN BIC-A03
- Stable pit frame, Steel, powder-coated, to install the weighing bridge so you can drive straight on, for models with weighing plate size
  - A**: 1088×1088×110 mm, KERN BIC-A04
  - B**: 1288×1088×110 mm, KERN BIC-A08
  - C**: 1288×1588×110 mm, KERN BIC-A05
  - D**: 1588×1588×110 mm, KERN BIC-A06
- Benchtop stand incl. wall mount for display device, KERN EOC-A04

- Internal rechargeable battery pack, operating time up to 43 h without backlight, charging time approx. 3 h, KERN KFB-A01
- USB data interface, for transferring weighing to the PC, printer etc., must be ordered at purchase, KERN KIB-A03
- Bluetooth data interface for wireless data transfer to PC or tablets, must be ordered at purchase, KERN KIB-A04
- WiFi interface for wireless connection of the balance to networks and WiFi capable devices, such as tablets, laptops or smartphones, continuous data transfer, must be ordered at purchase, KERN KIB-A10
- Ethernet data interface, to connect an IP-based Ethernet network, continuous data transfer, must be ordered at purchase, KERN KIB-A02
- Signal lamp, including interface, for visual support of weighing with tolerance range, must be ordered at purchase, KERN KIB-A06
- Alibi memory, for paperless archiving of the weighing results with ID no., gross/net/tare value, date and time, must be ordered at purchase, KERN KIB-A13
- **4** Verification plug, for verified balances this enables you to separate the display device and platform without affecting the verification, e.g. for installing the scale in a packing and dispatch table, pit frame etc. at a later date. Please order this at the same time as you purchase your scale, KERN KIB-A12

#### STANDARD



#### OPTION



#### FACTORY



Model	Weighing capacity [Max] kg	Readability [d] kg	Verification value [e] kg	Minimal load [Min] kg	Weighing plate	Net weight approx. kg	Verification	Options
							<b>M</b> KERN	<b>DAKKS Calibr. Certificate</b> DAKKS KERN
High-resolution versions with fine display								
BID 600K-1DS	300   600	0,05   0,1	-	-	<b>A</b>	70	-	963-130
BID 600K-1D	300   600	0,05   0,1	-	-	<b>C</b>	150	-	963-130
BID 1T-4DS	600   1500	0,1   0,2	-	-	<b>A</b>	70	-	963-130
BID 1T-4D	600   1500	0,1   0,2	-	-	<b>C</b>	150	-	963-130
BID 3T-3D	1500   3000	0,2   0,5	-	-	<b>C</b>	150	-	963-132
BID 3T-3DL	1500   3000	0,2   0,5	-	-	<b>D</b>	155	-	963-132
Multi-range balance, with increasing load it switches automatically to the next largest weighing range [Max] and readout [d] and when the load is fully removed, the balance switches back to the lower range								
BID 600K-1DSM	300   600	0,1   0,2	0,1   0,2	2   4	<b>A</b>	70	965-230	963-130
BID 600K-1DM	300   600	0,1   0,2	0,1   0,2	2   4	<b>C</b>	150	965-230	963-130
BID 1T-4DSM	600   1500	0,2   0,5	0,2   0,5	4   10	<b>A</b>	70	965-230	963-130
BID 1T-4DM	600   1500	0,2   0,5	0,2   0,5	4   10	<b>C</b>	150	965-230	963-130
BID 3T-3DM	1500   3000	0,5   1	0,5   1	10   20	<b>C</b>	150	965-232	963-132
BID 3T-3DLM	1500   3000	0,5   1	0,5   1	10   20	<b>D</b>	155	965-232	963-132
BID 600K-1SM	600	0,2	0,2	4	<b>A</b>	70	965-230	963-130
BID 600K-1M	600	0,2	0,2	4	<b>C</b>	150	965-230	963-130
BID 1T-4SM	1500	0,5	0,5	10	<b>A</b>	70	965-230	963-130
BID 1T-4EM	1500	0,5	0,5	10	<b>B</b>	85	965-230	963-130
BID 1T-4M	1500	0,5	0,5	10	<b>C</b>	150	965-230	963-130
BID 1T-4LM	1500	0,5	0,5	10	<b>D</b>	155	965-230	963-130
BID 3T-3M	3000	1	1	20	<b>C</b>	150	965-232	963-132
BID 3T-3LM	3000	1	1	20	<b>D</b>	155	965-232	963-132

Note: For devices that require verification (conformity assessment according to NAWI 2014/31/EU), please include the verification when placing your order. The initial verification is not possible after delivery. Please inform the full address of the location of use for the initial verification.

Note: For verified scales the weighing bridge must be fixed to the floor. Optionally, with an access ramp, a footplate pair or a pit frame

**Internal adjusting**  
Quick setting up of the balance's accuracy with internal adjusting weight (motordriven)

**Adjusting program CAL**  
For quick setting up of the balance's accuracy. External adjusting weight required

**EasyTouch**  
Suitable for the connection, data transmission and control through PC or tablet

**Memory**  
Balance memory capacity, e.g. for article data, weighing data, tare weights, PLU etc.

**Alibi memory**  
Secure, electronic archiving of weighing results, complying with the 2014/31/EU standard.

**KERN Universal Port (KUP)**  
allows the connection of external KUP interface adapters, e.g. RS-232, RS-485, SB, Bluetooth, WIFI, Analogue, Ethernet etc. for the exchange of data and control commands, without installation effort

**RS-232 Data interface**  
To connect the balance to a printer, PC or network

**RS-485 Data interface**  
To connect the balance to a printer, PC or other peripherals. Suitable for data transfer over large distances. Network in bus topology is possible

**USB Data interface**  
To connect the balance to a printer, PC or other peripherals

**Bluetooth\* Data interface**  
To transfer data from the balance to a printer, PC or other peripherals

**WIFI Data interface**  
To transfer data from the balance to a printer, PC or other peripherals

**Control outputs**  
(optocoupler, digital I/O)  
To connect relays, signal lamps, valves, etc.

**Analogue interface**  
to connect a suitable peripheral device for analogue processing of the measurements

**Interface for second balance**  
For direct connection of a second balance

**Network interface**  
For connecting the scale to an Ethernet network

**KERN Communication Protocol (KCP)**  
It is a standardized interface command set for KERN balances and other instruments, which allows retrieving and controlling all relevant parameters and functions of the device. KERN devices featuring KCP are thus easily integrated with computers, industrial controllers and other digital systems

**GLP/ISO log intern**  
The balance displays weight, date and time, independent of a printer connection

**GLP/ISO log Printer**  
With weight, date and time. Only with KERN printers.

**Piece counting**  
Reference quantities selectable. Display can be switched from piece to weight

**Recipe level A**  
The weights of the recipe ingredients can be added together and the total weight of the recipe can be printed out

**Recipe level B**  
Internal memory for complete recipes with name and target value of the recipe ingredients. User guidance through display

**Totalising level A**  
The weights of similar items can be added together and the total can be printed out

**Percentage determination**  
Determining the deviation in % from the target value (100 %)

**Weighing units**  
Can be switched to e.g. nonmetric units. See balance model. Please refer to KERN's website for more details

**Weighing with tolerance range (Checkweighing)**  
Upper and lower limiting can be programmed individually, e.g. for sorting and dosing. The process is supported by an audible or visual signal, see the relevant model

**Hold function**  
(Animal weighing program)  
When the weighing conditions are unstable, a stable weight is calculated as an average value

**Protection against dust and water splashes IPxx**  
The type of protection is shown in the pictogram

**Suspended weighing**  
Load support with hook on the underside of the balance

**Battery operation**  
Ready for battery operation. The battery type is specified for each device

**Rechargeable battery pack**  
Rechargeable set

**Universal plug-in power supply**  
with universal input and optional input socket adapters for  
A) EU, CH, GB  
B) EU, CH, GB, US  
C) EU, CH, GB, US, AUS

**Plug-in power supply**  
230V/50Hz in standard version for EU, CH. On request GB, USA or AUS version available

**Integrated power supply unit**  
Integrated in balance. 230V/50Hz standard EU. More standards e.g. GB, USA or AUS on request

**Weighing principle Strain gauges**  
Electrical resistor on an elastic deforming body

**Weighing principle Tuning fork**  
A resonating body is electromagnetically excited, causing it to oscillate

**Weighing principle Electromagnetic force compensation**  
Coil inside a permanent magnet. For the most accurate weighings

**Weighing principle Single cell technology**  
Advanced version of the force compensation principle with the highest level of precision

**Conformity Assessment**  
The time required for conformity assessment is specified in the pictogram

**DAkkS calibration possible (DKD)**  
The time required for DAkkS calibration is shown in days in the pictogram

**Factory calibration (ISO)**  
The time required for Factory calibration is shown in days in the pictogram

**Package shipment**  
The time required for internal shipping preparations is shown in days in the pictogram

**Pallet shipment**  
The time required for internal shipping preparations is shown in days in the pictogram

\* The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by KERN & SOHN GmbH is under license. Other trademarks and trade names are those of their respective owners.